Flexi CEILING T-GRID

MAIN TEE · CROSS TEE · WALL ANGLE

Colform offers a range of high quality ceiling suspension system called **Flexi Ceiling T-Grid**. It is a system of metal members, designed to support a suspended ceiling, typically an acoustical ceiling. The profiles are rollformed from high quality hot dipped zinc coat and prepainted steel sheet material to prevent from rust.

The ceiling tees are produced from state-of -art rollforming and online punch machines. Both heads and all middle holes are cut-off and punched at the same time after forming. This will eliminate accumulated hole distance error which can almost achieve zero error accuracy.

Features:

- ✓ Durable
- ✓ Easy to Install
- ✓ Light & Easy lift-up
- ✓ Clean modular ceiling appearance
- ✓ Stability of interlocking exposed grid

SIRIM QAS INTERNATIONAL

QUALITY SYSTEM SIRIM UKAS 074 Certified to ISO 9001:2008

Another ***quality product*** *from*

COLFORM

Profile Details

12' Main Tee (FMT12)

Specification Thickness	GI: +/- 0.30mm
Measurement	3660mm(L) x 32mm(H) x 24mm(W)
Packing (Qty/Ctn)	30pcs/pack
Finishing	White coated

4' Cross Tee (FCT4)

Specification Thickness	GI: +/- 0.30mm
Measurement	1220mm(L) x 26mm(H) x 24mm(W)
Packing (Qty/Ctn)	90pcs/pack
Finishing	White coated

2' Cross Tee (FCT2)

Specification Thickness	GI: +/- 0.30mm
Measurement	610mm(L) x 26mm(H) x 24mm(W)
Packing (Qty/Ctn)	90pcs/pack
Finishing	White coated

10' Wall Angle (FWA10)

Specification Thickness	PPGI: +/- 0.30mm - 0.40mm
Measurement	3048mm(L) x 24mm(H) x 24mm(W)
Packing (Qty/Ctn)	50pcs/pack
Finishing	White coated

Assembly by Illustration

Ceiling Tee Installation Plan

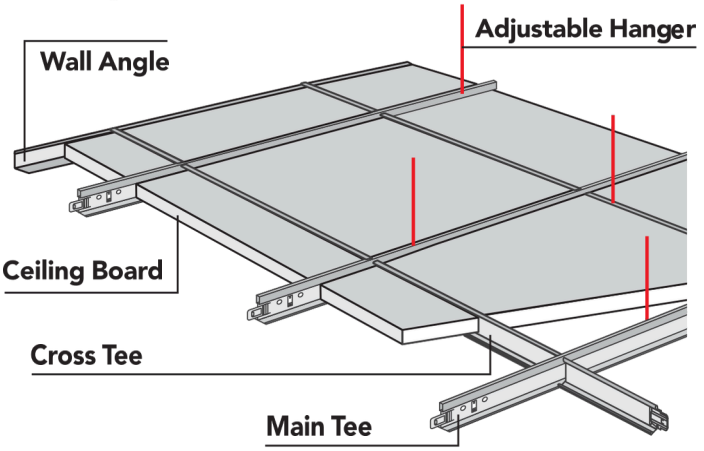

Ceiling Tee Layout Plan

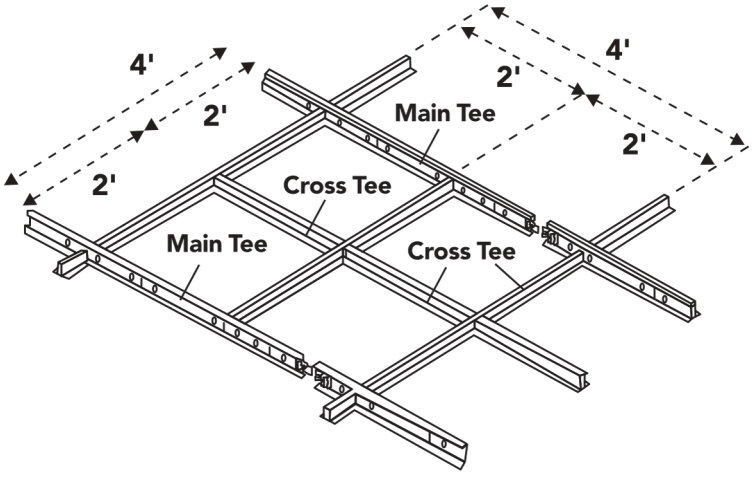

FOR MORE INFO,
PLEASE CONTACT US AT:

COLFORM SDN. BHD. (605945-H)

www.colform.com.my

KOTA KINABALU (HQ)
Lot 8, Jalan 2A KKIP Timur, Industrial Zone 12
(IZ12), Kota Kinabalu Industrial Park,
89208 Tuaran, Sabah.
Tel: +6088-472 221 / 011-3307 6264

SANDAKAN
Lot 197, Lorong Sedco 5,
Sedco Light Industrial Estate, Off Mile 2.5,
Jalan Utara, 90000 Sandakan, Sabah.
Tel: +6089-238 833 / 089-272 323 Fax: +6089-278 530